



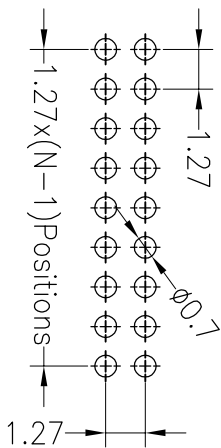

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


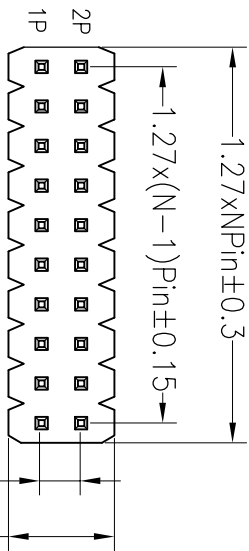


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

1410 12 XX X N XX S XXX X 01

No of Pins Per Row 02~50P
 Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA66, E=BK-PA9T, F=BK-LCP
 Post: w=with post, N=w/o post
 Contact Plating: G0:30u" Gold, G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, G6:10U" Gold, G7:15U" Gold, S0:Gold Flash/Tin
 Pin Length
 Plating code stream: O=PE Bag 01~99, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar, SN:tin

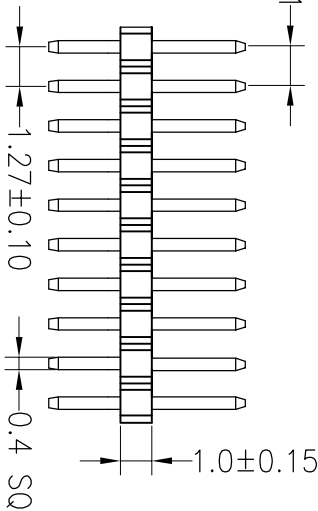

Dimension antitheses list			
ITEM	PA	PC	L
Standard	3.00	2.50	6.30

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2016.04.22	塑胶改良, 侧面增加槽口	
A0	2012.04.19	NEW DRAWING	

OPERATION		SCALE	FIT
X.X	±0.30	UNIT	mm
X.XX	±0.20	SIZE	A4
X:XXX	±0.10	SHEET	1/1
Angle	±3°	PROJ.	
DIM	TOL	TITLE:	

OPERATION	DRAW	LJLJIANJUN	16.08.18	JILIN 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892	
CHECK	CHECK			PART NO.	141012XXXXXXSXXXX01
APPROVE	APPROVE			TITLE:	1.27PH 2xNPin H1.0 180° 非平面胶芯