





FILE NO: E382310

**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C



Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

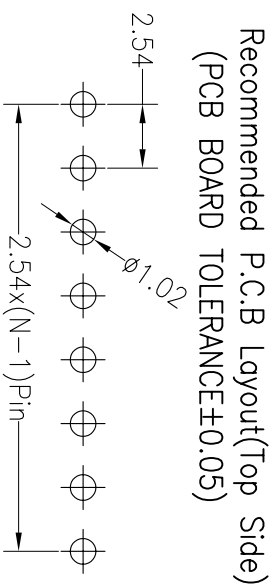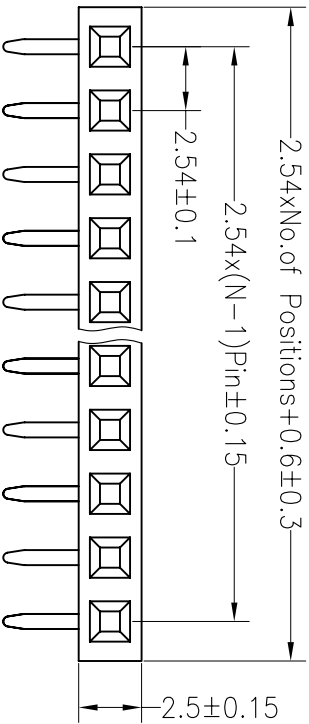

**Ordering Information**

2250 01 XX X N XX R U X 01

- No. of Pins Per Row 1\*40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold
- Packing: O=PE Bag, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar
- SN: Tin

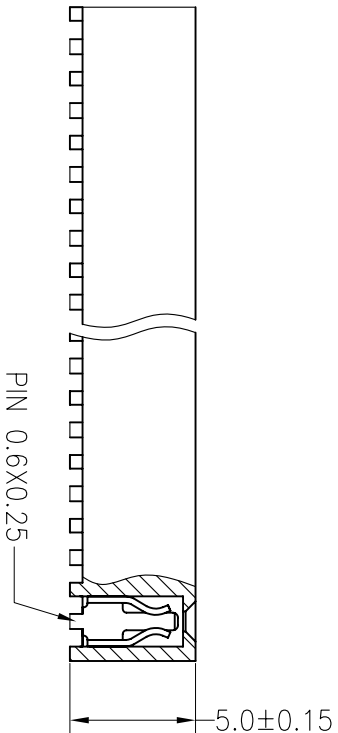

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YUSheng	15.04.28	UNIT	mm	A4	1/1	225001XXXXXRU01	
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
CHANGE								TITLE:	
								2.54PF H5.0mm 1xNpin 90° W2.5	

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992