




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c


Contact Material:Brass
Contact Plating: Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

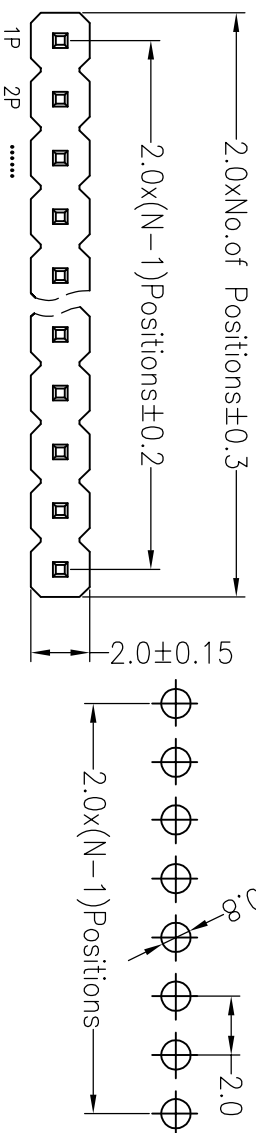

Ordering Information

1320 11 XX X N XX S XXX X 01

| | | | | |
|---------------------|---------------------------|-----------------|-------------------|--------------|
| No. of Pins Per Row | Insulator Material Option | Contact Plating | Pin Length | Packing |
| 1x40 | A=BK-PBT | G0:Gold Flash | 0=PE Bag | A=Troy |
| 2x40 | C=BK-PA6T | G1:1U" Gold | T=Tube | P=Tube+Cap |
| 3x40 | D=BK-PA46 | G2:1.5U" Gold | R=Reel+Cap | M=Reel+Mylar |
| 1--40 | E=BK-PA9T | G3:2U" Gold | G4:3U" Gold | |
| 2--80 | F=BK-LCP | G5:5U" Gold | G6:10U" Gold | |
| 3--120 | | G7:15U" Gold | S0:Gold Flash/Tin | |

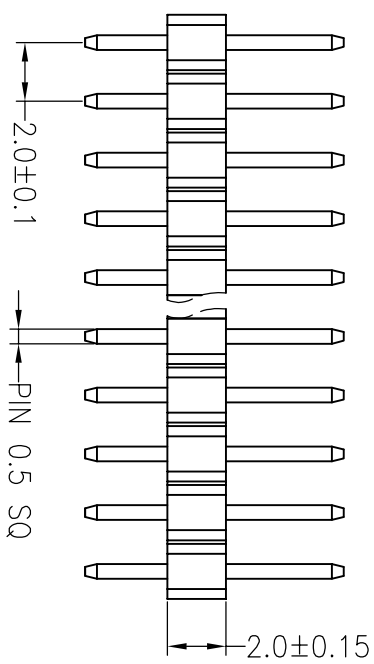

| ITEM | PC | PA | L |
|----------|------|------|------|
| Standard | 2.80 | 3.90 | 8.70 |

| | | | | | | | | | |
|-----------|------------|--------------------------|----------|-------|-----|-----|-----|---------------------------------|--|
| OPERATION | | DRAW | | SCALE | | FIT | | TITLE: | |
| X.X | ±0.30 | YYuSheng | 19.09.19 | UNIT | mm | A4 | 1/1 | PART NO. 132011XXXXXSXXXX01 | |
| X.XX | ±0.20 | CHECK | | SIZE | | | | 2.0PH 1xNpin H2.0mm Single 180° | |
| X:XXX | ±0.10 | APPROVE | | SHEET | 1/1 | | | | |
| Angle | ±3° | | | PROJ. | | | | | |
| DIM | TOL | | | | | | | | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | | | | | | |
| A0 | 2019.09.19 | NEW DRAWING | | | | | | | |
| 1 | | | | | | | | | |

JILIN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892