
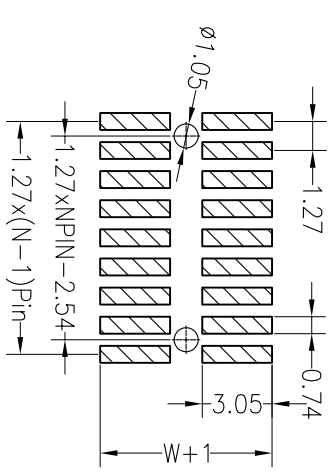


SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)




Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

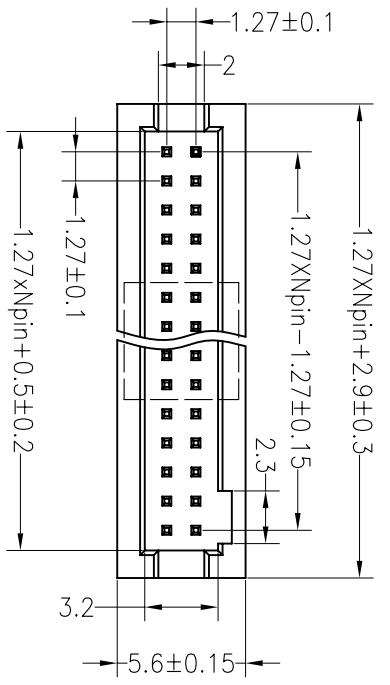

Ordering Information

3232 XX M XX X B D00 X 01(2)

No. of Pins 10-100P
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Packing
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

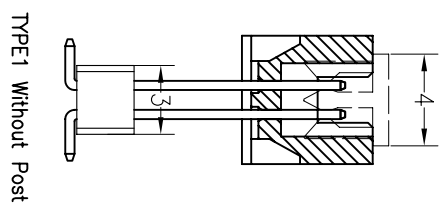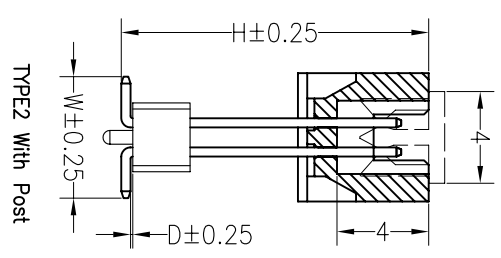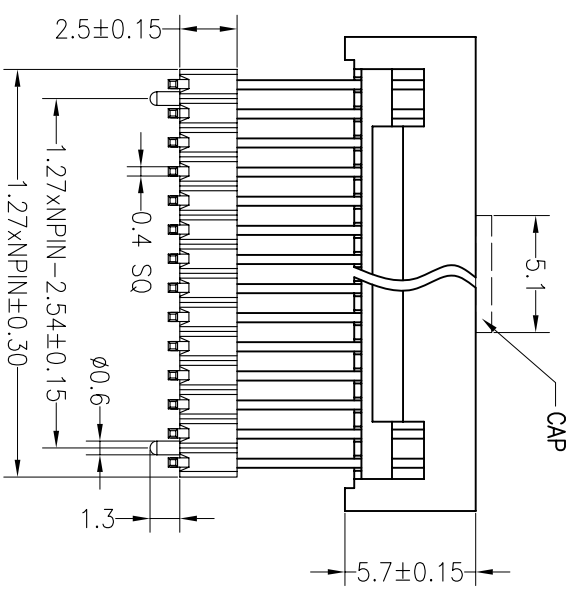

Dimension antitheses list			
ITEM	H	W	D
Standard		6.50	0.10
Alternate			

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YUSheng		UNIT	mm	A4	1/1	3232XXMXXBDD00X01(2)	
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1	1.27Box Header Npin H5.7+H2.5 SMT	
X.XXX	±0.10	APPROVE		PROJ.		TITLE:			
Angle	±3°								
DIM	TOL								

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	
1			