
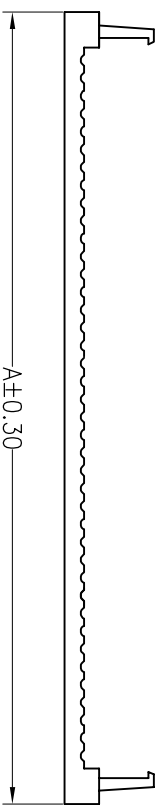
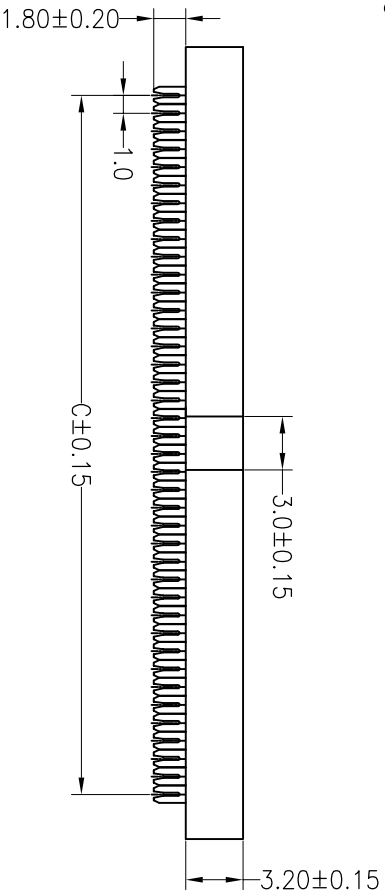




SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

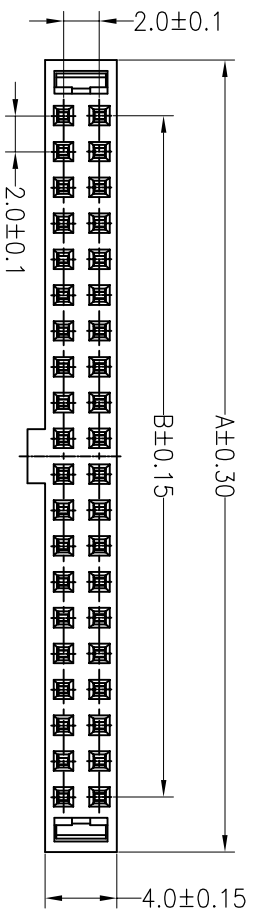

Pin	Dimension mm		
	A	B	C
06	10.20	4.00	5.00
08	12.20	6.00	7.00
10	14.20	8.00	9.00
12	16.20	10.00	11.00
14	18.20	12.00	13.00
16	20.20	14.00	15.00
18	22.20	16.00	17.00
20	24.20	18.00	19.00
24	28.20	22.00	23.00
26	30.20	24.00	25.00
30	34.20	28.00	29.00
34	38.20	32.00	33.00
40	44.20	38.00	39.00
44	48.20	42.00	43.00
50	54.20	48.00	49.00
60	64.20	58.00	59.00
64	68.20	62.00	63.00



Ordering Information

5327 XX U P XX B X 01

No. of Pins: 06~64P
 Contact Plating: G0:Gold Flash, S0:Gold Flash/Ni, S1:3U" Gold/Ni, S2:5U" Gold/Ni, S3:10U" Gold/Ni, S4:20U" Gold/Ni, S5:30U" Gold/Ni, SN:NI
 Option Type: W=With Bump, N=Without Bump

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YYuSheng	16.01.16	SCALE		FIT	PART NO.	TITLE:
				DIM	TOL				UNIT	mm			
A0	2016.01.16	NEW DRAWING		X.XX	±0.30	CHECK							
1				X.XX	±0.20								
				X:XXX	±0.10								
				Angle	±3°								

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892