

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 10A
2. Withstanding voltage : AC1600V/1Min.
3. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	400V
Rate current(A)	32A

2. Wire range : 0.2~1.5mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=04~48P
3. Stripping length : 10~11mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm					-	∩	□				
TO	Over	TO	Over	TO	Over	TO	TO	TO					
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	100	100 TO 150	150	0.1/10		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'				

6. RoHS Compliance

Ordering Information

JL15EDGKNHBM- 350 XX G 0 1

Pitch 350=3.50PH  
 No. of pins 4P~48P  
 Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey  
 Packing  
 Q=Pe bag  
 T=Tube  
 A=Tray

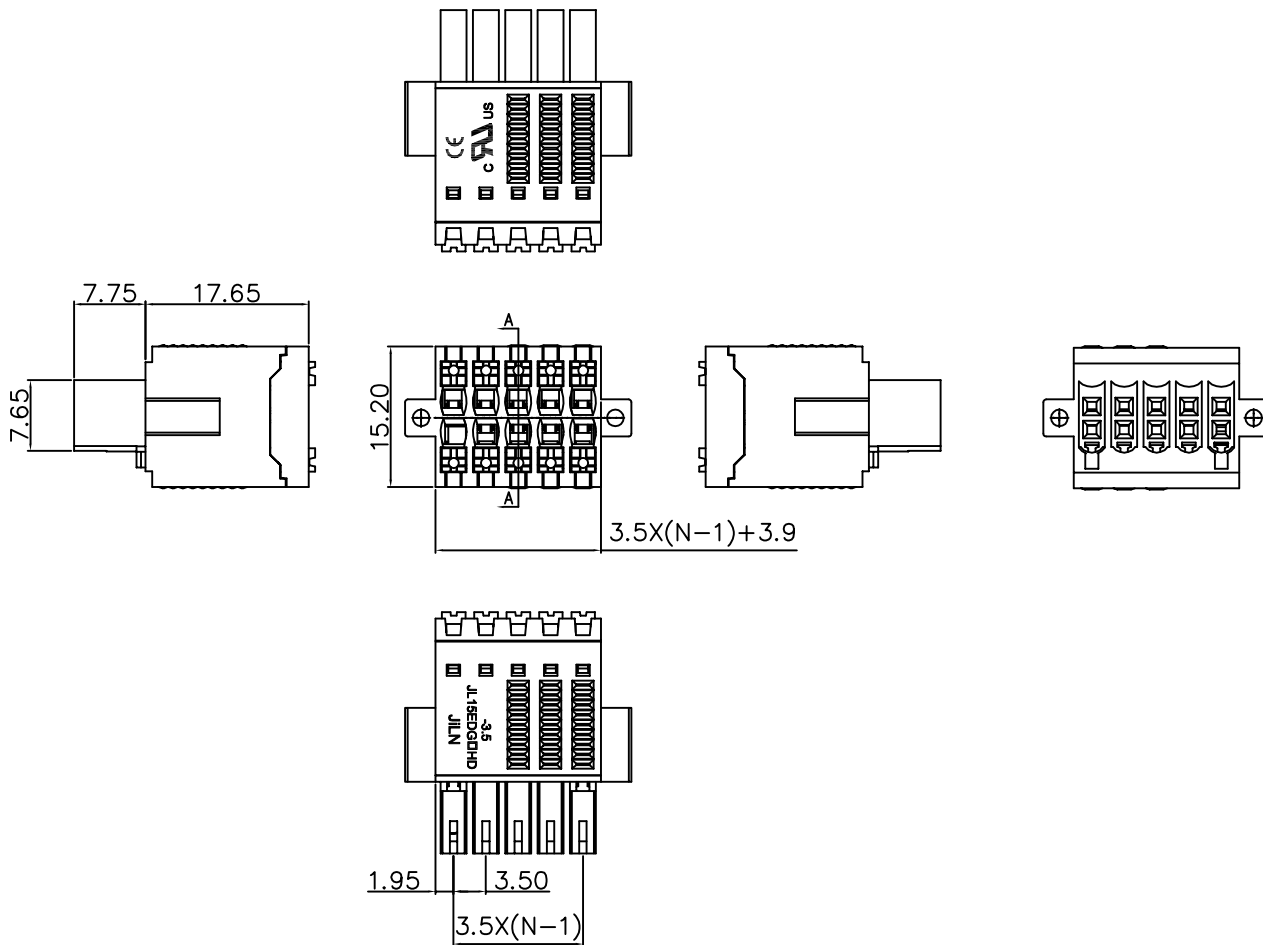

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3'
DIM	TOL

DRAW  
CHECK  
APPROVE

Jelly Feng 21.08.20

SCALE  
FIT  
UNIT mm  
SIZE A4  
SHEET 1/1  
PROJ.

**JILN®** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. JL15EDGKNHBM-350XXG01  
 TITLE: JL15EDGKNHBM-3.50-XXP 插拔式母座/绿色

A0	2021.08.20	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE