





**SPECIFICATIONS**

Rated Current: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

**Ordering Information**

2443-02 XX X N XX Z U X 01

No. of Pins Per Row: 1450  
 Insulator Material Option:  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 F=BK-LCP  
 Contact Plating:  
 G0: Gold Flash  
 G2: 5U" Gold  
 G3: 10U" Gold  
 G4: 15U" Gold  
 G5: 30U" Gold  
 S0: Gold Flash/Tin  
 SN: Tin  
 Packing:  
 O=PE Bag  
 A=Troy  
 T=Tube  
 P=Tube+Cap  
 R=Reel+Cap  
 M=Reel+Mylar

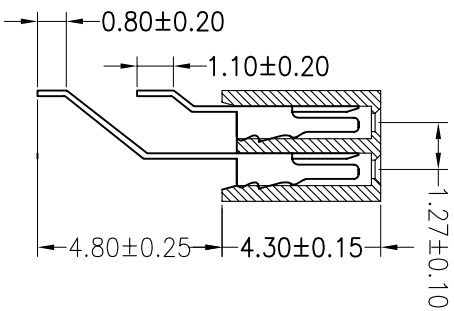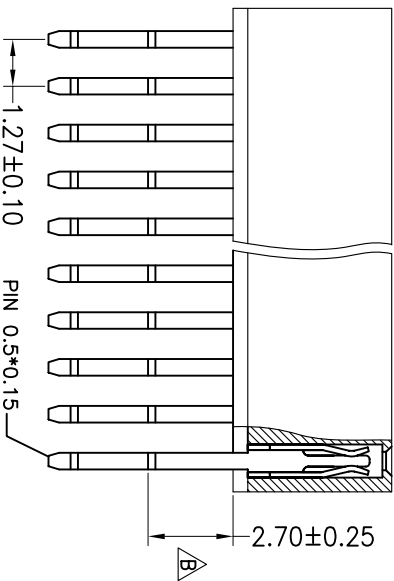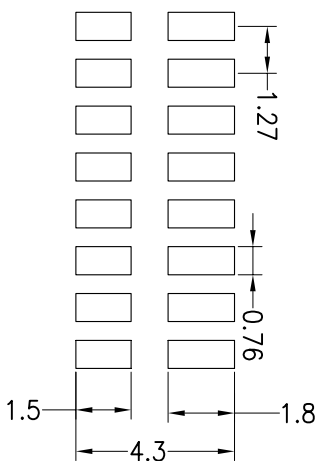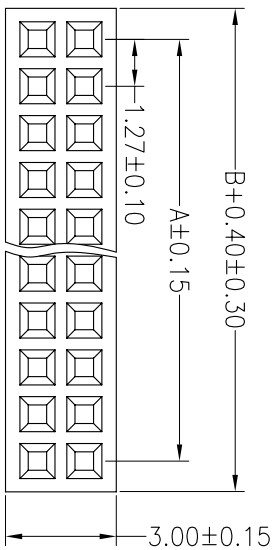

|           |            |                          |          |       |     |                      |  |
|-----------|------------|--------------------------|----------|-------|-----|----------------------|--|
| OPERATION |            | DRAW                     |          | SCALE | FIT | PART NO.             |  |
| X.X       | ±0.30      | lioujianjun              | 16.12.19 | UNIT  | mm  | 2443-02XXXXXZUX01    |  |
| X.XX      | ±0.20      | CHECK                    |          | SIZE  | A4  | 1.27PF 2xNPin H4.3间距 |  |
| X.XXX     | ±0.10      | APPROVE                  |          | SHEET | 1/1 |                      |  |
| Angle     | ±3°        |                          |          | PROJ. |     |                      |  |
| DIM       | TOL        |                          |          |       |     |                      |  |
| REV       | DATE       | MODIFICATION DESCRIPTION | CHANGE   |       |     |                      |  |
| A         | 2012.04.18 | NEW DRAWING              |          |       |     |                      |  |
| B         | 2016.12.19 | PC短脚由2.3改为2.7            |          |       |     |                      |  |

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO., LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992