

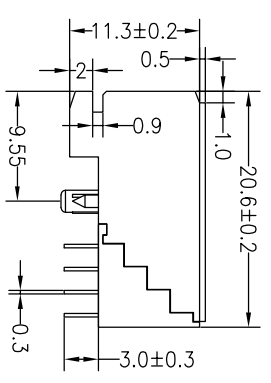


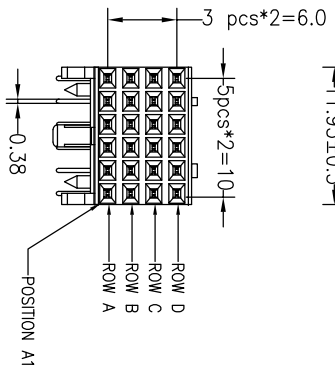

SPECIFICATIONS

Rated Current: 1.5AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Ordering Information

35104 24 A F R XX BW X 1

- No. of Pins: 24P
- Contact Type: F:Female, M:Male
- Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:21μ" Gold/Tin, S2:50μ" Gold/Tin, S3:10μ" Gold/Tin, S4:15μ" Gold/Tin, S5:30μ" Gold/Tin, SN:Tin
- Packing: A:Tray, T:Tube

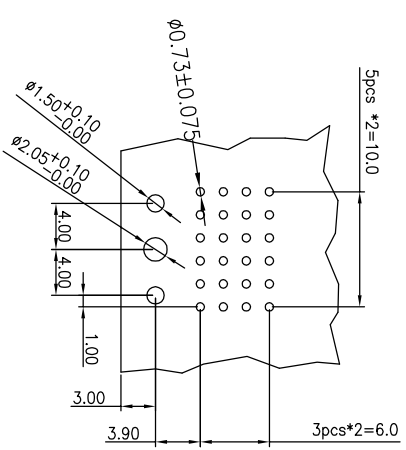

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

| | | | | | | | | | |
|-----------|------------|--------------------------|----------|-------|-----|--------|-----|--|--|
| OPERATION | | DRAW | | SCALE | | FIT | | TITLE: | |
| X.X | ±0.30 | YYuSheng | 19.06.09 | UNIT | mm | A4 | 1/1 | FUTURE BUS, 4*6 Female 90° | |
| X.XX | ±0.20 | CHECK | | SIZE | A4 | SHEET | | PART NO. | |
| X.XXX | ±0.10 | APPROVE | | PROU. | 1/1 | SHEET | | 3510424AFRXXBW X1 | |
| REV | DATE | MODIFICATION DESCRIPTION | | DIM | TOL | CHANGE | | Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892 | |
| 1 | 2019.06.09 | NEW DRAWING | | | | | | 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD | |