

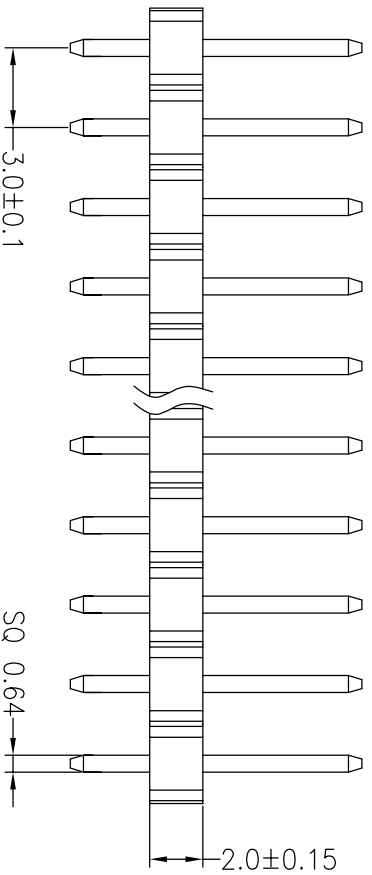


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60seconds
 (260°C for 10 seconds)

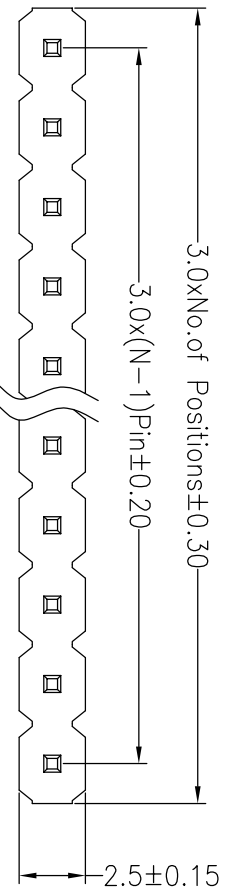

Ordering Information

11420 11 XX X N XX S XXX X 0X

No. of Pins Per Row 1~20P
 Insulator Material Option
 A=BK-PBT
 C=BK-PA6T
 Contact Plating
 G0: Gold Flash
 G1: 1.0U" Gold
 G2: 1.5U" Gold
 G3: 2.0U" Gold
 G4: 3.0U" Gold
 G5: 5.0U" Gold
 G6: 10U" Gold
 G7: 15U" Gold
 S0: Gold Flash/Tin
 SN: Tin
 Pin Length
 Packing code
 O=PE Bag 01~99
 A=Troy
 T=Tube
 R=Reel+Cap

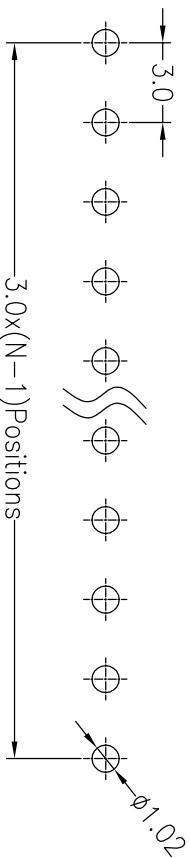

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

Dimension ontheses list				
ITEM	PA	PC	L	
Alternate	6.00	3.00	11.00	

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	ChenWei	20.03.14	UNIT	mm			PART NO. 1142511XXXXXXSXXXXX0X	
X.XX	±0.20	CHECK		SIZE	A4			3.0PH H2.0mm 1xNpin 180°	
X.XXX	±0.10	APPROVE		SHEET	1/1				
Angle	±3°			PROJ.					
DIM	TOL								

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.03.14	NEW DRAWING	
1			